

XRCM200 Dual Output Series

200 W DC-DC Converter

XRCM200 Dual Output DC-DC Converter is a reliable power supply designed for railway and transportation applications. It supports all standard railway battery configurations with its flexible input voltage range. The dual output delivers 200 W at ± 15 V.

This converter is intended for chassis mounting and features a fully enclosed housing.

Key features include an interruption time of 10 ms (Class S2), a shutdown input for remote control, and an output voltage monitor that controls a relay.



FEATURES

- RoHS lead-free-solder product
- Ultra wide input voltage range 16.8 - 137.5 V covering all common railway battery voltages
- Dual output +15 V / -15 V
- Closed housing for chassis mounting
- Extremely high efficiency and high power density
- Low inrush current
- 3 connectors: Input, output, auxiliary
- Overtemperature, overvoltage, overcurrent, and overload protections
- Multiple options available
- Low profile mechanical design
- Compliant to EN 50155, EN 50121-3-2, AREMA
- Fire and smoke compliant to EN 45545 & NFPA 130
- 5 year warranty
- Safety-approved to IEC/EN 62368-1*, CSA 62368-1* and UL 62368-1*

* Pending



Table of Contents

Description.....	1	Electromagnetic Compatibility (EMC).....	8
Model Selection.....	2	Immunity to Environmental Conditions.....	9
Electrical Input Data	3	Mechanical Data.....	10
Electrical Output Data	5	Safety and Installation Instructions.....	11
Description of Options.....	7	Accessories.....	13



MODEL SELECTION

Table 1: Standard models

$V_{i \min}$ ¹ [V]	Input voltage			$V_{i \max}$ ¹ [V]	Output		Power $P_{o \text{ nom}}$ [W]	Efficiency ²		Model	Options
	$V_{i \text{ cont}}$ [V]				$V_{o \text{ nom}}$ [V]	$I_{o \text{ nom}}$ [A]		$\eta_{\min}$ [%]	η_{typ} [%]		
14.4	16.8	(24 - 110)	137.5	154	+15	6.70	100	86	89	XRCM200-1515DM	F, K
					-15	6.70	100				

¹ Short time; see table 2 for details.

² Efficiency at $T_A = 25^\circ\text{C}$, $V_{i \text{ nom}}$, $I_{o \text{ nom}}$, $V_{o \text{ nom}}$, only option DM fitted.

Part Number Description

XRCM 200 -1515 DM F K

SeriesXRCM

Output power:
200 W200

Nominal output voltage:
+15 / -15 V.....1515

Auxiliary functions and options:
Out OK, interruption time, shutdown.....DM
Option: Fuse built-in.....F
Option: Pluggable ConnectorsK

Note: The sequence of options must follow the order above.

Note: All models are RoHS-compliant for all six substances.

Example: XRCM200-1515DMF: DC-DC converter, input voltage range 16.8 to 137.5 V continuously, output providing $\pm 15 \text{ V} / 6.7 \text{ A}$, monitoring relay, shutdown input, interruption time 10 ms, integrated fuse, operating ambient temperature, $T_A = -40$ to 70°C , RoHS-compliant for all six substances.

Product Marking

Type designation, applicable safety approval and recognition marks, CE mark, pin allocation, and product logo.

Input voltage range and input current, nominal output voltage and current, degree of protection, batch no., serial no., and data code including production site, version (modification status) and date of production.

XRCM200 Series

Dual Output DC-DC Converter



ELECTRICAL INPUT DATA

General conditions:

- $T_A = 25\text{ }^{\circ}\text{C}$, unless T_C is specified.

Table 2: Input data of XRCM200 models

Model			XRCM200			Unit
Characteristics		Conditions	min	typ	max	
$V_{i\text{cont}}$	Operating input voltage continuous	$I_o = 0 - I_{o\text{max}}$ $T_{C\text{min}} - T_{C\text{max}}$	16.8	(24 / 110)	137.5	V
V_{i2s}	For ≤ 2 s	without shutdown	14.4		154	
$V_{i\text{nom}}$	Nominal input voltage		24, (36, 48, 72),110			
$V_{i\text{abs}}$	Input voltage limits	3 s without damage	0		165	
I_i	Typical input current	$V_{i\text{nom}}, I_{o\text{nom}}$		9.3		A
P_{i0}	No-load input power ²	$V_{i\text{max}}, I_o = 0$		4	6	W
$P_{i\text{SD}}$	Idle input power ²	$V_{i\text{max}}, V_{\text{SD}} = 0$ V			1	
C	Input capacitance ¹			56		μF
R	Input resistance				140	mΩ
I_{inr}	Inrush current peak ³	$V_i = V_{i\text{max}}, P_{o\text{nom}}$			50	A
	Inrush current duration				1	ms
t_{on}	Start-up time	$0 \rightarrow V_{i\text{min}}, P_{o\text{nom}}$			1000	ms
	Start-up time after removal of shutdown	$V_{i\text{min}}, P_{o\text{nom}}$ $V_{\text{CN}} = 0 \rightarrow 12$ V or open			500	

¹ Not smoothed by the inrush current limiter at start-up (for inrush current calculation).

² Typ. value at $V_{i\text{max}}$. At lower V_i , the idle and low-load input power are smaller.

³ X capacitors charging excluded from evaluation.

Input Transient and Reverse Polarity Protection

A suppressor diode and a symmetrical input filter form an effective protection against input transients, which typically occur in many installations, but especially in battery-driven mobile applications.

If the input voltage has the wrong polarity, the incorporated antiparallel diode causes the external input circuit breaker or fuse to trip. With option F (incorporated fuse), an active reverse-polarity protection circuit prevents the internal fuse to trip.

Input Under-/Overvoltage Lockout

If the input voltage is out of range, an internally generated inhibit signal disables the converter to avoid any damage.

Inrush Current and Stability with Long Supply Lines

The converter operates with relatively small input capacitance C_i resulting in low inrush current of short duration.

If a converter is connected to the power source through supply lines with reasonable length, no additional measures are necessary to ensure stable operation.

Only in the case of very long supply lines exhibiting a considerable inductance L_{ext} , an additional external capacitor C_{ext} connected across the input pins improves the stability and prevents oscillations; see fig. 2.

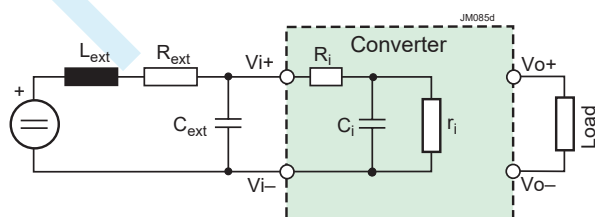


Fig. 2
Input configuration



Asia-Pacific
+86 755 298 85888

EMEA
+353 61 531 820

North America
+1 866 513 2839

powersupport@belf.com
belfuse.com

Actually, the RCM Series converter with its load acts as negative resistor r_i , because the input current I_i rises, when the input voltage V_i is decreased. It tends to oscillate with a resonant frequency determined by the line inductance L_{ext} and the input capacitance $C_i + C_{ext}$, damped by the resistor R_{ext} . The whole system is not linear at all and eludes a simple calculation. One basic condition is given by the formula:

$$C_i + C_{ext} > \frac{L_{ext} \cdot P_{o \max}}{R_{ext} \cdot V_{i \min}^2} \quad (r_i = \frac{dV_i}{dI_i})$$

C_i is specified in table 2. R_{ext} is the series resistor of the voltage source including supply lines. If this condition is not met, the converter may fail to achieve stable operation. The most critical scenario occurs at lowest input voltage (V_i) and highest output power (P_o). To enhance stability, it is advantageous to use supply lines with low inductance (L_{ext}) of the supply and an additional external capacitor (C_{ext}).

ELECTRICAL OUTPUT DATA

General conditions:

- $T_A = 25^\circ\text{C}$, unless T_C is specified

Table 4: Output data of XRCM200 models.

Output Characteristics		Conditions	+15 V			-15 V			Unit
			min	typ	max	min	typ	max	
V_o	Output voltage	$V_{i\text{ nom}}, 0.5 I_{o\text{ nom}}$	14.85	15.00	15.15	-15.15	-15.00	-14.85	V
V_{ow}	Worst case output voltage	$V_{i\text{ min}} - V_{i\text{ max}}$ $T_{C\text{ min}} - T_{C\text{ max}}, 0 - I_{o\text{ nom}}$	14.55		15.45	-14.45		-15.55	
V_{oL}	Overvoltage shutdown ⁵			17.5			-17.5		V
V_{oP}	Overvoltage protection ¹		17.8		19.8	-19.8		-17.8	
$I_{o\text{ nom}}$	Nominal output current			6.7			-6.7		A
I_{oL}	Output current limit	$T_{C\text{ min}} - T_{C\text{ max}}$	6.9		7.9	-7.9		-6.9	
V_o	Output noise ²	Switching frequency		60			60		mV _{pp}
		Total incl. spikes BW = 20 MHz		100			100		
V_{od}	Dynamic load regulation	Voltage deviation ⁴		800			800		ms
t_d ³		Recovery time		5			5		
α_{vo}	Temperature coefficient of V_o (NTC)	$0 - I_{o\text{ nom}}, T_{C\text{ min}} - T_{C\text{ max}}$	-0.02		0	-0.02		0	%/K

¹ Breakdown voltage of the incorporated suppressor diode at 1 mA. Exceeding this value might damage the suppressor diode.² Measured according to IEC/EN 61204 with a probe described in annex A³ Recovery time until V_o returns to $\pm 1\%$ of V_o ; see fig. 4.⁴ No overshoot at switch on.⁵ Output overvoltage protection by an electronic circuitry with automatic restart.

Output Voltage Regulation

Line and load regulation of the output is so good that input voltage and output current have virtually no influence to the output voltage.

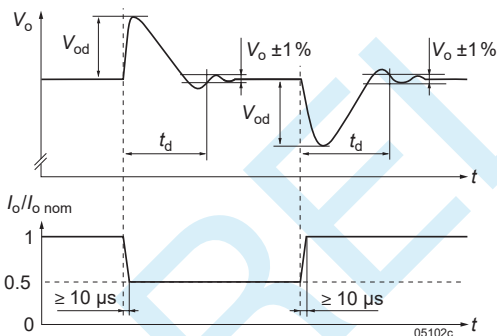


Fig. 4
Typical dynamic load regulation of output voltage

Thermal Considerations and Protection

A temperature protection is incorporated in the primary and secondary control logic each. It generates an internal inhibit signal, which disables the converter in case of overtemperature. The converter automatically recovers, when the temperature drops below the limit. The relationship between T_A and T_C depends heavily upon the conditions of operation and integration into a system.

Caution: The installer must ensure that under all operating conditions T_C remains within the limits stated in table 8.

Output Current Limitation

The outputs are continuously protected against open-circuit (no load) and short-circuit by an electronic current limitation with rectangular characteristic and automatic recovery. Over current event on one of the outputs has no effect on performance of the other one. However LED indicator and Output Monitor signal will change its state and will report it as potential problem with one of the outputs to the operator or application system.

Series and Parallel Connection

The outputs of several RCM Series converters may be connected in series.

Note: If the sum of the output voltages is greater than 60 V, it cannot be considered as ES1 (Electrical energy source class 1) according to the safety standards.

Several RCM models of the same type can be operated in parallel connection. To ensure proper current sharing, the load lines should have equal length and section. The output voltage exhibits a slight droop characteristic, which facilitates current sharing. In addition, the output voltage tends to be lowered with increasing temperature.

LED Indicator

The converters exhibit a green LED "Out OK", signaling that both output voltages are within the specified range.

Output Monitor, Shutdown

Option D consists of auxiliary functions and encompasses an additional auxiliary connector.

Output Voltage Monitor (D)

The output voltage of both outputs is monitored. When outputs are within regulation range, solid state relay contact between OK0 and OK1 is closed. If output voltages (one of them or both) is for any reason out of regulation range, relay contact OK0 to OK1 is open.

Data of relay contacts: 0.14 A / 154 VDC max.

When selecting load current for OK1/OK2 signals, please consider derating curve, shown in Fig.5.

Primary Shutdown (SD)

The outputs of the converter may be enabled or disabled by a logic signal (e.g. CMOS) applied between the shutdown pin SD and SD0 (= Vi-). If the shutdown function is not required, pin SD can be left open-circuit. Voltage on pin SD:

Converter operating: 12 to 154 V or open-circuit
 Converter disabled: -2 to +2 V

The output response is shown in Fig. 6.

Note: In systems consisting of several converters, this feature may be used to control the activation sequence by logic signals or to enable the power source to start up, before full load is applied.

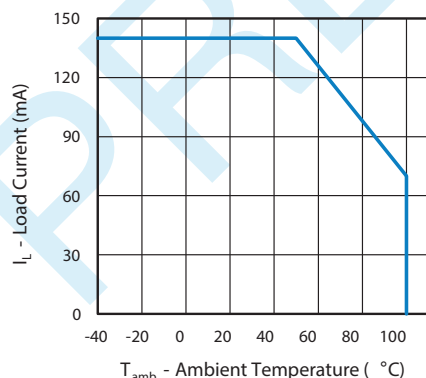


Fig. 5
Load Current vs. Ambient Temperature

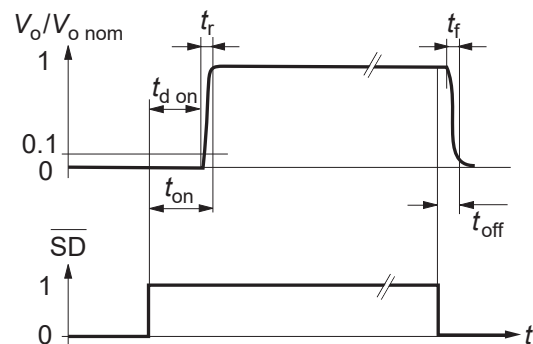


Fig. 6
Typical output response to the SD-signal

Interruption Time

The interruption time t_{hu} is specified in the railway standard EN 50155:2021 clause 5.2.4. It is tested at the nominal battery voltage for interruption and short-circuit of the input. After such an event, the system is ready for another such event after 10 s. Fig. 7 shows the output voltage V_o with option M.

$t_{hu} = 10$ ms (Class S2) in all other cases.

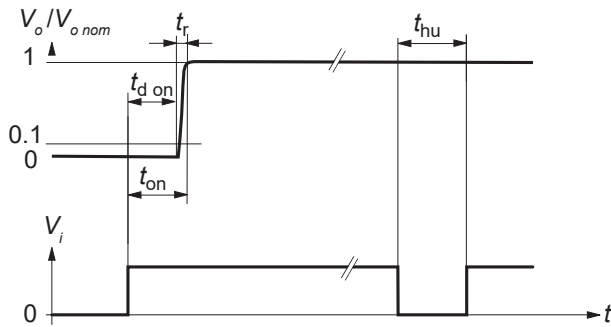


Fig. 7
Typical output response to V_i

DESCRIPTION OF OPTIONS

Option F: Incorporated Fuse

The railway standard EN 50155 discourages the use of fuses within converters. Consequently, the installer must provide an external fuse or circuit breaker. However, when this is not possible, an internal fuse is available (option F). This fuse is not accessible and will only trip in the event of a converter defect.

Note: Converters with option F or option M are protected against input reverse polarity by a series diode.

Option K: Pluggable Connectors

This option allows the use of pre-assembled pluggable connectors; for details see *Accessories*.

Note: Female connectors must be ordered separately.

ELECTROMAGNETIC COMPATIBILITY (EMC)

Electromagnetic Immunity

Table 6: Electromagnetic immunity (type tests). Corresponds or Exceeds EN 50121-3-2:2016/A1:2019 and AREMA

Phenomenon	Standard	Level	Coupling mode ¹	Value applied	Waveform	Source imped.	Test procedure	In oper.	Perf. crit. ²
Electrostatic discharge (to case)	IEC/EN 61000-4-2	4	contact discharge	6000 V _p	1/50 ns	330 Ω 150 pF	10 pos. & 10 neg. discharges	yes	A
			air discharge	8000 V _p					
Electromagnetic field	IEC/EN 61000-4-3	x	antenna	20 V/m	AM 80% / 1 kHz	N/A	80 – 800 MHz 800 – 1000 MHz 1400 – 2000 MHz 2000 – 2700 MHz 5100 – 6000 MHz	yes	A
			antenna	20 V/m					
				20 V/m					
				5 V/m					
				3 V/m					
Electrical fast transients/burst	IEC/EN 61000-4-4	3	capacitive, o/c	±2000 V _p	bursts of 5/50 ns; 2.5/5 kHz over 15 ms; burst period: 300 ms	50 Ω	60 s positive 60 s negative transients per coupling mode	yes	A
		3	i/c, +i/-i direct coupling						
Surges	IEC/EN 61000-4-5	3	i/c	±2000 V _p	1.2 / 50 μs	42 Ω 0.5 μF	5 pos. & 5 neg. surges per coupling mode	yes	B
			+i/-i	±1000 V _p		12 Ω 9 μF			B
			i/c	±2000 V _p		2 Ω 18 μF			
			+i/-i	±1000 V _p					
Conducted disturbances	IEC/EN 61000-4-6	3	i, o, signal wires	10 VAC (140 dBμV)	AM 80% / 1 kHz	150 Ω	0.15 – 80 MHz	yes	A
Power frequency magnetic field	IEC/EN 61000-4-8	3		300 A/m			60 s in all 3 axis	yes	A

¹ i = input, o = output, c = case² A = normal operation, no deviation from specs.; B = normal operation, temporary loss of function or deviation from specs possible

Electromagnetic Emissions

All conducted emissions have been tested as per EN 50121-3-2:2016/A1:2019, table 2.1, and coincide with EN 50121-4:2016/A1:2019, table 1.1.

Radiated emissions have been tested according to EN 50121-3-2:2016/A1:2019.

Note: The highest frequency of the internal sources of EUT is less than 108 MHz. Hence, Radiated Measurement was made up to 1 GHz.

The power supply is compliant to DB EMV 06 regulation, Annex E, Class S2.

IMMUNITY TO ENVIRONMENTAL CONDITIONS

Table 7: Mechanical and climatic stress. Air pressure 800 – 1200 hPa

Test method		Standard	Test Conditions		Status
Ad	Low temperature start-up test	EN 50155:2021, clause 13.4.4 IEC/EN 60068-2-1	Temperature, duration: Performance test:	- 40 °C, 2 h +25 °C	Not operating
Be	Dry heat test, cycle B	EN 50155:2021, clause 13.4.5 IEC/EN 60068-2-2	Temperature: Duration:	70 °C (+15 °C) 6 h	Operating perf. crit. A
Db 2	Cyclic damp heat test	EN 50155:2021, clause 13.4.8 IEC/EN 60068-2-30	Temperature: Cycles (respiration effect): Duration:	55 °C and 25 °C 2 2x 24 h	Not operating
Ka	Salt mist test sodium chloride (NaCl) solution	EN 50155: 2021, clause 13.4.13 IEC/EN 60068-2-11	Temperature: Duration:	35 ±2 °C 48 h	Converter not operating
-	Functional random vibration test	EN 50155: 2021, clause 13.4.10.4 EN 61373:2010 clause 8, class B, body mounted ¹	Acceleration amplitude: Frequency band: Test duration:	0.1 g _n = 1.01 m/s ² 5 – 150 Hz 30 min (10 min in each axis)	Operating perf. crit. A
-	Simulated long life testing	EN 50155: 2021, clause 13.4.10.2 EN 61373:2010 clause 9, class B, body mounted ¹	Acceleration amplitude: Frequency band: Test duration:	0.58 g _n = 5.72 m/s ² 5 – 150 Hz 15 h (5 h in each axis)	Not operating
-	Shock test	EN 50155: 2021, clause 13.4.10.3 EN 61373:2010 clause 10, class B, body mounted ¹	Acceleration amplitude: Bump duration: Number of bumps:	5.1 g _n 30 ms 18 (3 in each direction)	Operating perf. crit. A
-	Vibration sinusoidal	AREMA Part. 11.5.1 class C, D, E, I, J	Displacement amplitude: Acceleration amplitude: Frequency: Test duration:	0.3" (5 – 10 Hz) 0.07" (5 – 20 Hz) 1.5 g _n = 14.7 m/s ² (10 – 200 Hz) 5 – 200 Hz 12 h (4 h in each axis)	Operating perf. crit. A
-	Mechanical shock	AREMA Part. 11.5.1 class C, D, E, I, J	Acceleration amplitude: Bump duration: Number of bumps:	10 g _n = 98 m/s ² 11 ms 18 (3 in each direction)	Operating perf. crit. A

¹ Body mounted = chassis of a railway coach

Temperatures

Table 8: Temperature specifications, valid for an air pressure of 800 – 1200 hPa (800 – 1200 mbar)

Temperature			EN 50155:2021 Class OT4			Unit
Characteristics		Conditions	min	max	10 minutes	°C
T_A	Ambient temperature	Converter operating	- 40	70	85	
T_C	Case temperature ¹		- 40	100		
T_S	Storage temperature	Not operational	- 55	85		

¹ Measured at the measurement point T_C (see Mechanical Data)

Reliability

Table 9: MTBF

Calculation method	Model	MTBF
According to IEC 61709 / SN-29500	XRCM200-1515	TBD h min

XRCM200 Series

Dual Output DC-DC Converter



MECHANICAL DATA

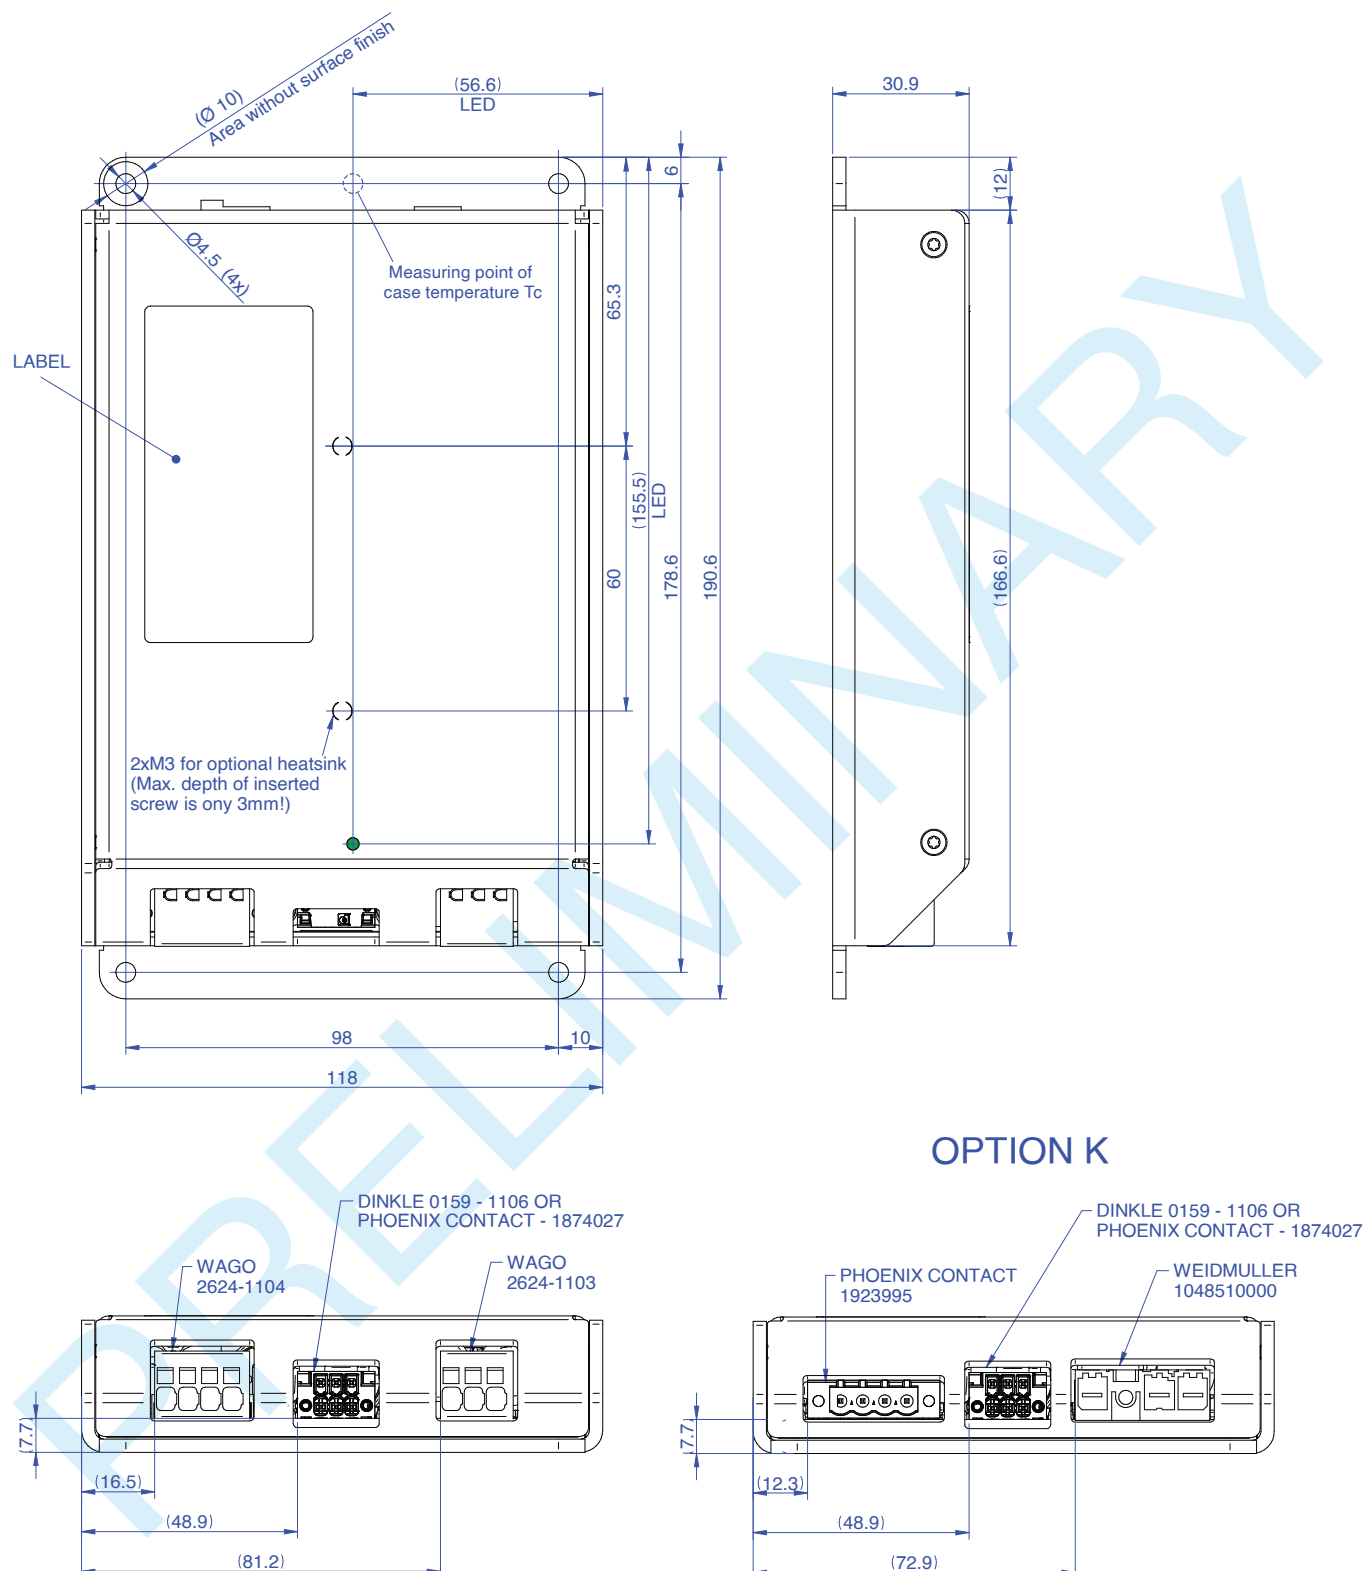


Fig. 8
Case of XRCM200
weight approx. 800 g, Aluminum, black anodized



Asia-Pacific +86 755 298 85888 EMEA +353 61 531 820 North America +1 866 513 2839

powersupport@belf.com
belfuse.com

SAFETY AND INSTALLATION INSTRUCTION

Connectors and Pin Allocation of XRCM200

X1 - Input connector:

3 pins: Wago 2624-1103; PE, Vi-, Vi+,
wire section: 0.2 – 6 mm², 24 – 10 AWG
with option K: Weidmüller 1048500000

X2 - Output connector:

4 pins: Wago 2624-1104, Vo-, 0 V, 0 V, Vo+
wire section: 0.2 – 4 mm², 24 – 12 AWG
with option K: Phoenix Contact 1923995

X3 - Auxiliary connector:

Phoenix Contact 1874027;

For pin allocation see Fig. 10.

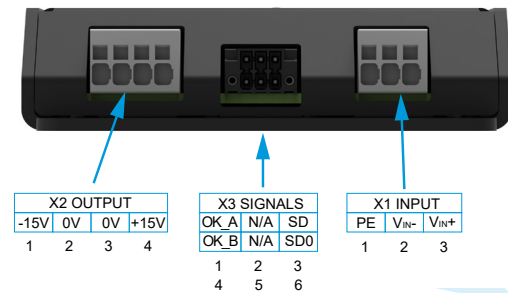


Fig. 10

Pin allocation of XRCM200

* Pin designators shall match connector datasheet

Installation Instruction

These converters are components, intended exclusively for inclusion by an industrial assembly process or by a professionally competent person. Installation must strictly follow the national safety regulations in respect of the enclosure, mounting, creepage distances, clearances, markings and segregation requirements of the end-use application.

Connection to the system shall only be effected with cables with suitable wire section.

The auxiliary connector shall be connected via the suitable female connector; see *Accessories*.

Other installation methods may not meet the safety requirements. Check that PE is safely connected to protective earth.

No fuse is incorporated in the converter (except for option F). An external circuit breaker or a fuse in the wiring to one or both input pins.

Do not open the converters, or the warranty will be invalidated. Make sure that there is sufficient airflow available for convection cooling and that the temperature of the bottom plate is within the specified range. This should be verified by measuring the case temperature at the specified measuring point, when the converter is operated in the end-use application. $T_{C\max}$ should not be exceeded. Ensure that a failure of the converter does not result in a hazardous condition.

Standards and Approvals

The XRCM200 Series converters are approved according to the last edition of IEC/EN 62368-1* and UL/CSA 62368-1*

*Pending

Cleaning Liquids and Protection Degree

The converters are not hermetically sealed. In order to avoid possible damage, any penetration of liquids shall be avoided.

The converters correspond to protection degree IP 30.

Railway Applications

The XRCM200 converter is designed observing the railway standards EN 50155:2021, EN 50121-3-2:2016/A1:2019, EN 50124-1:2017 and AREMA. All boards are coated with a protective lacquer.

The converter complies with the fire & smoke standard EN 45545-2:2020/A1:2023, HL1 to HL3, NFPA 130.

Insulation Test

The electric strength test is performed in the factory as routine test in accordance with EN 62911, EN 50155:2021 and AREMA. It should not be repeated in the field, and the Company will not honor warranty claims resulting from incorrectly executed electric strength tests.

Table 10: Isolation

Characteristics	Input to Output ¹	Input to Case	Output to Case	OK contacts to			Unit
				Input	Case	Outputs	
Voltage withstand levels (tested acc. to IEC 62368-1)	4.48	2.86	1.0	2.86	N/A ³	N/A ³	kVDC
Voltage withstand levels (designed to meet AREMA and factory tested)	4.48 ¹	2.86	2.86	2.86	2.86	2.86	kVDC
Insulation resistance ²	>300	>300	>300	>300	>300	>300	MΩ
Creepage distances	4.5	2.5	2.5	2.5	2.5	2.5	mm

¹ Pretest of subassemblies in accordance with IEC/EN 62368-1

² Tested at 500 VDC

³ No safety isolation requirements applicable between OK contacts to chassis and OK contacts to output per IEC 62368-1

XRCM200 Series

Dual Output DC-DC Converter



ACCESSORIES

Female Connectors

A suitable female auxiliary connector HZZ02021 (Phoenix Contact 1790302) is available (Fig. 11), wire section: 0.2 – 1.5 mm², 24 – 16 AWG.




Fig. 11
Female connector 6 pins (Phoenix Contact 1790302)

For converters with option K, use connectors in Fig. 12:

- HZZ02020 (3 poles, Weidmüller 1060640000), wire section: 0.5 – 10 mm², 24 – 8 AWG
- HZZ00151-G (4 poles, Phoenix Contact 1942280), wire section: 0.2 – 2.5mm², 24 – 12 AWG




Fig. 12a
Female connector for option K, 3 poles (HZZ02020)




Fig. 12b
Female connector for option K, 4 poles (HZZ00151-G)

DIN-Rail Mounting Bracket DMB

A suitable DIN-Rail mounting bracket HZZ00625-G is available, see Fig. 13.



Fig. 13
DIN-Rail mounting bracket for RCM series HZZ00625-G

NUCLEAR AND MEDICAL APPLICATIONS - These products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific
+86 755 298 85888

EMEA
+353 61 531 820

North America
+1 866 513 2839

powersupport@belf.com
belfuse.com