

240W isolated DC-DC converter  
Wide input and regulated single output



Patent Protection

RoHS



## FEATURES

- Wide input voltage range: 36-75 VDC
- High efficiency up to 95%
- I/O isolation test voltage 1500 VDC
- Operating ambient temperature range: -40°C to +85°C
- Input under-voltage protection, over-voltage, over-current protection, output short circuit, over-temperature protection
- Industry standard package: 1/8 brick

VCB48\_EBO-240W(F/H)R3-N series is a high performance product designed for the field of communication power supply, the output power can reach 240W, no minimum load requirements, with a wide voltage input of 36-75VDC, allowing the operating temperature up to 85°C. It features input under-voltage, output over-voltage, output over-current, output short-circuit, over-temperature protection, remote control and compensation, output-voltage regulation and other functions, by adding additional circuits to meet CISPR32/EN55032 CLASS B. It is widely used in battery powered equipment, industrial control, electric power, instrumentation, communication, intelligent robots and other fields.

## Selection Guide

Certification	Part No. <sup>①</sup>	Input Voltage (VDC)		Output		Full Load Efficiency(%) Min./Typ.	Half- Load Efficiency(%) Min./Typ.	Max. Capacitive Load(μF)	Mix. Capacitive Load <sup>③</sup> (μF)
		Nominal (Range)	Max. <sup>②</sup>	Voltage (VDC)	Current (mA) Max./Min.				
-	VCB4810EBO-240W(F/H)R3-N	48 (36-75)	80	10.8	22200/0	92/94	93/95	10000	470
	VCB4812EBO-240W(F/H)R3-N			12	20000/0				

Notes:

- ① Suffix "F" means the product with aluminum base, "H" for the heat sink package;  
② The input voltage should not exceed this value, otherwise permanent and unrecoverable damage may be caused;  
③ In order to ensure the stability of output voltage, the output side of the product must be externally connected with a minimum capacitive load.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	Nominal input voltage	--	5319/60	5435/100	mA
Reflected Ripple Current	Nominal input voltage	--	200	--	
Surge Voltage (1sec. max.)		-0.7	--	100	VDC
Start-up Voltage		--	--	36	
Input Under-voltage Protection		30	32	--	
Start-up time	Nominal input voltage & constant resistance load	--	--	100	ms
Input Filter		LC filter			
Hot Plug		Unavailable			
Ctrl <sup>①</sup>	Module turn-on	Ctrl pin pulled low to GND (0-1.2VDC)			
	Module turn-off	Ctrl pin open or pulled high (TTL 3.5-12VDC)			
	Respond Time	--	30	50	ms

Note: <sup>①</sup>The Ctrl pin voltage is referenced to input -Vin.

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy		--	±1	±3	%
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5	
Load Regulation	5%-100% load	--	±0.5	±0.75	

Transient Recovery Time	25% load step change(2.5A/us), nominal input voltage	--	--	400	μs
Transient response deviation		--	±2	±3	%
Temperature Coefficient	Full load	--	--	±0.03	%/°C
Ripple & Noise①	nominal input voltage, 100% load	--	100	200	mVp-p
Trim		90	--	110	%Vo
Sense		--	--	105	
Over-temperature Protection	Product surface max. temperature	--	130	--	°C
Over-voltage Protection	Input voltage range	110	125	130	%Vo
Over-current Protection		110	140	170	%Io
Short-circuit Protection		Hiccup, continuous, self-recovery			

Note: ①The "Tip and barrel method" is used for ripple and noise test, please refer to Wide Input Voltage DC-DC Converter Application Guide for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max	Input-output	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ	
Operating Temperature	See temperature derating curves	-40	--	+85	°C	
Storage Temperature		-55	--	+125		
Storage Humidity	Non-condensing	5	--	95	%RH	
Pin Soldering Resistance Temperature	Wave soldering, 10 seconds	--	--	260	°C	
	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300		
Shock and Vibration Test		10-150Hz, 5G, 0.75mm. along X, Y and Z				
Switching Frequency ①	PWM mode	--	370	--	KHz	
MTBF	MIL-HDBK-217F@25°C	--	2000	--	K hours	

Note: ①Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.







### Mechanical Specifications

Shell Material	Aluminium alloy shell				
Size	VCB48_EBO-240WR3-N	58.42 x 22.86 x 10.7 mm			
	VCB48_EBO-240WFR3-N	58.42 x 22.86 x 13.2 mm			
	VCB48_EBO-240WHR3-N	58.42 x 22.86 x 25.9 mm			
Weight	VCB48_EBO-240WR3-N	30.5g(Typ.)			
	VCB48_EBO-240WFR3-N	42g(Typ.)			
	VCB48_EBO-240WHR3-N	61g(Typ.)			
Cooling Method	Natural air cooling or forced air cooling				

### Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B (See Fig. 6 for recommended circuits)			
	RE	CISPR32/EN55032 CLASS B (See Fig. 6 for recommended circuits)			
EMS	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV			perf. Criteria B
	RS	IEC61000-4-3 10V/m (See Fig. 6 for recommended circuits)			perf. Criteria A
	EFT	IEC61000-4-4 ±2KV (See Fig. 6 for recommended circuits)			perf. Criteria A
	Surge	IEC/EN61000-4-5 line to line ±2KV (See Fig. 6 for recommended circuits)			perf. Criteria B
	CS	IEC61000-4-6 10Vr.m.s (See Fig. 6 for recommended circuits)			perf. Criteria A

Typical Characteristic Curve

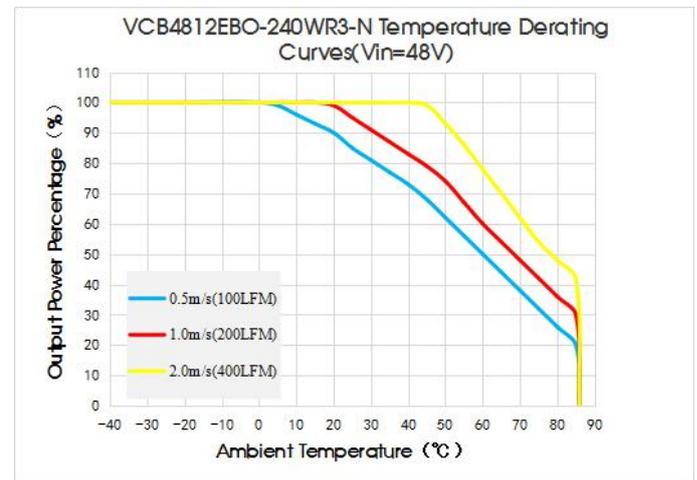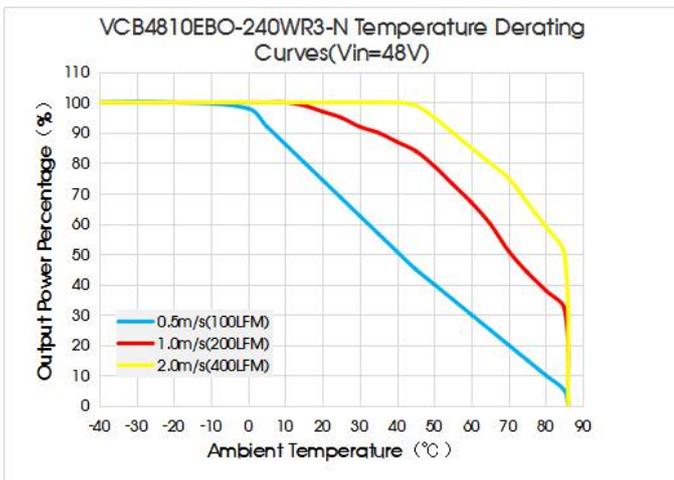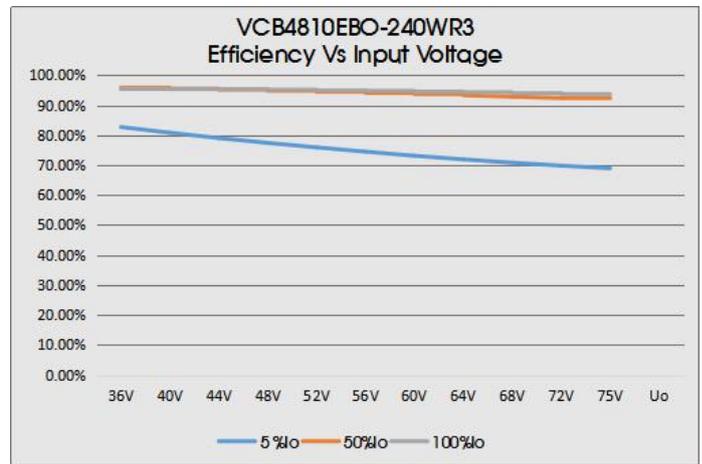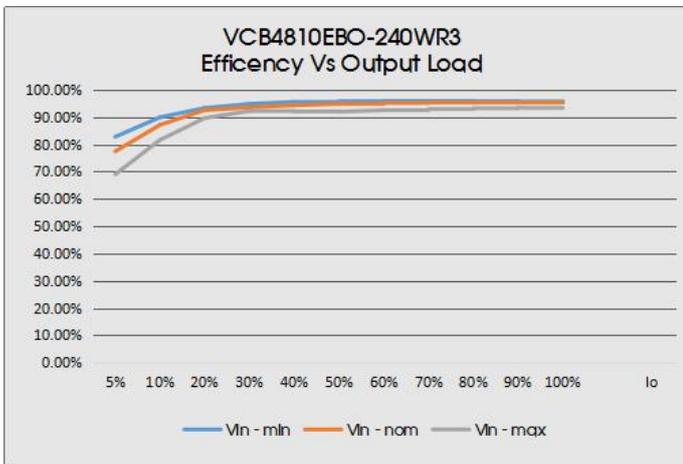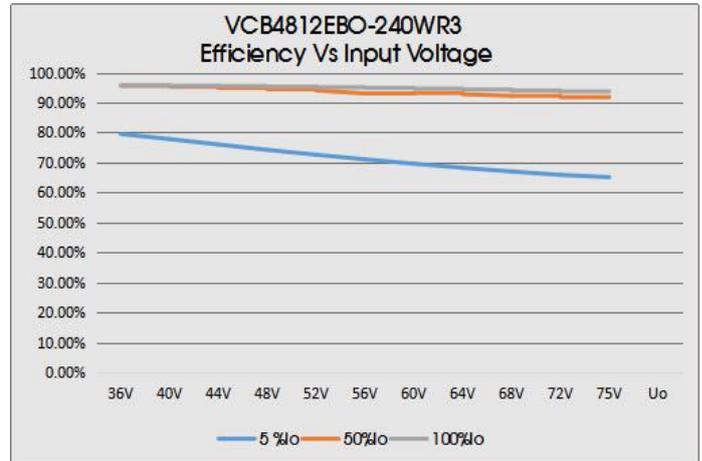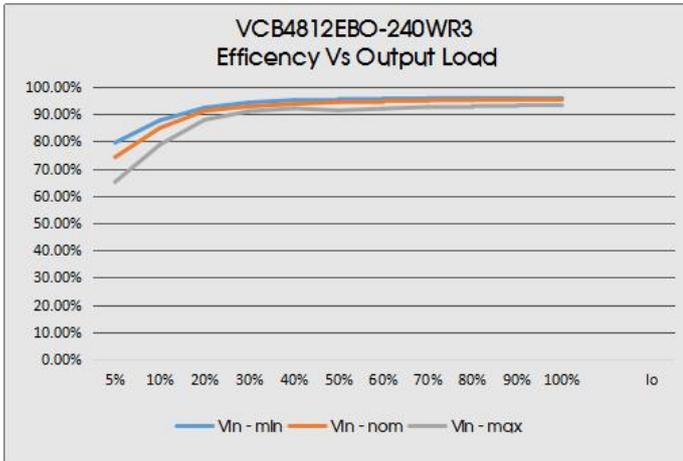

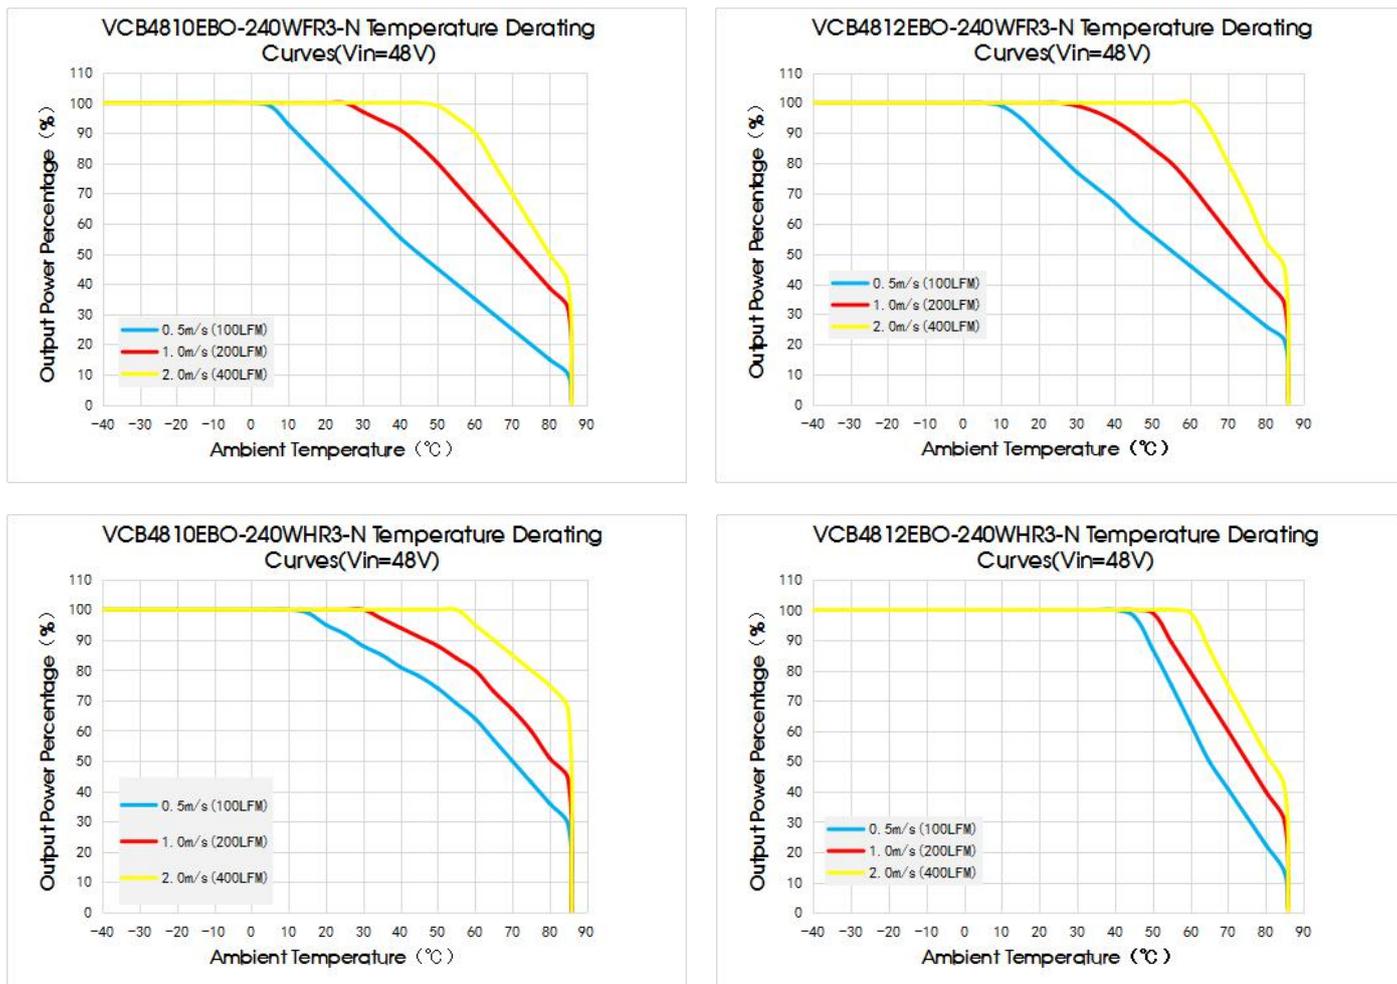


Fig. 1

## Remote Sense Application

### 1. Remote Sense Connection if not used

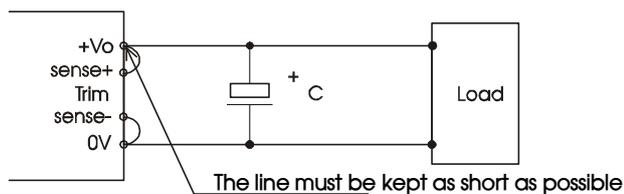


Fig. 2

#### Notes:

- (1) If the sense function is not used for remote regulation the user must connect the +Sense to +Vo and -Sense to 0V at the DC-DC converter pins and will compensate for voltage drop across pins only.
- (2) The connections between Sense lines and their respective power lines must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

### 2. Remote Sense Connection used for Compensation

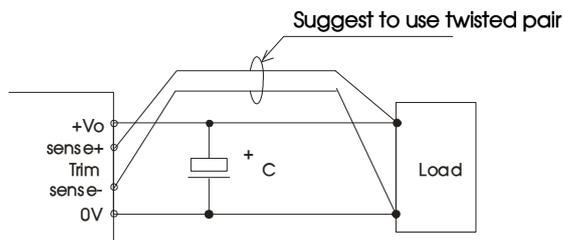


Fig. 3

Notes:

- (1) Using remote sense with long wires may cause unstable output, please contact technical support if long wires must be used.
- (2) PCB-tracks or cables/wires for Remote Sense must be kept as short as possible. Twisted pair or shielded wairs are suggested for remote compensation and must be kept as short as possible.
- (3) We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.
- (4) Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

Design Reference

1. Ripple&Noise

All the DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 4.

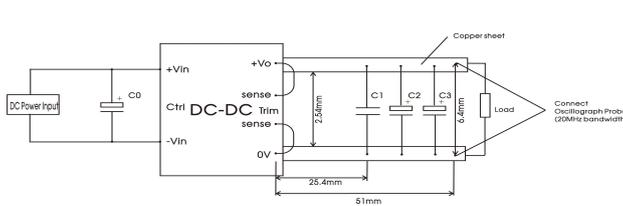


Fig. 4

Capacitors value	C0	C1	C2	C3
Output voltage				
10.8VDC	220uF/100V	1uF/25V	10uF/50V	470uF/350V
12VDC				

2. Typical application

We recommended using Mornsun's EMC circuit, otherwise please ensure that at least a 220µF electrolytic capacitors is connected at the input in order to ensure adequate voltage surge suppression and protection.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 5

Capacitance Values	Cout(min.)	Cin
Output Voltage		
12V/10.8V	470µF	220 µF

3. EMC compliance recommended circuit

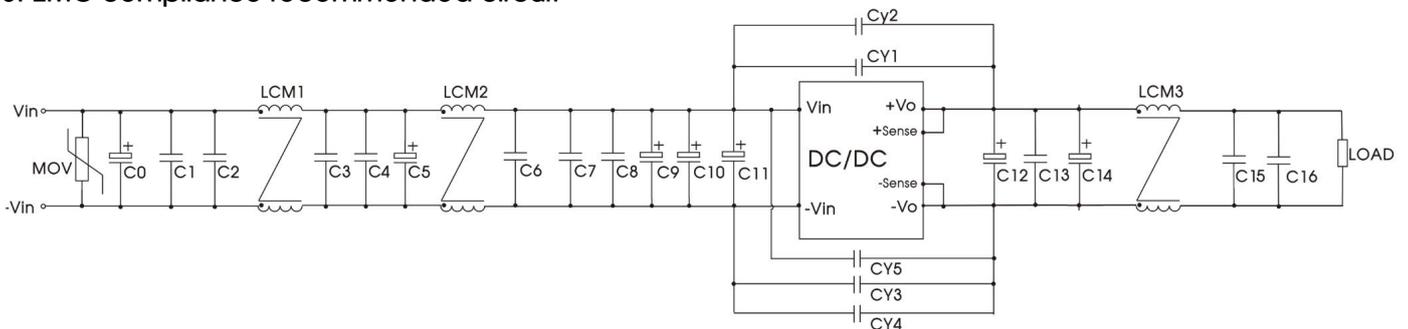


Fig. 6

Device	Parameters
MOV	14D101K varistor
C0	680μF/100V electrolytic capacitor
C11	470μF/100V electrolytic capacitor
C12	470uF/63V electrolytic capacitor
C5, C9, C10	100uF/100V electrolytic capacitor
C14	470uF/35V solid-state capacitor
C1, C2, C3, C4, C6, C7, C8, C13, C15, C16	4.7μF/100V ceramic capacitance
LCM1, LCM2	T24 x 23.5 x 19/4mH/35mΩ max
LCM3	T26 x 26 x 12/130uH/4mΩ max
CY1, CY2, CY3, CY5	1nF/400VAC safety standard Y capacitor
CY4	2.2nF/400VAC safety standard Y capacitor

4. Trim function for output voltage adjustment (open if unused)

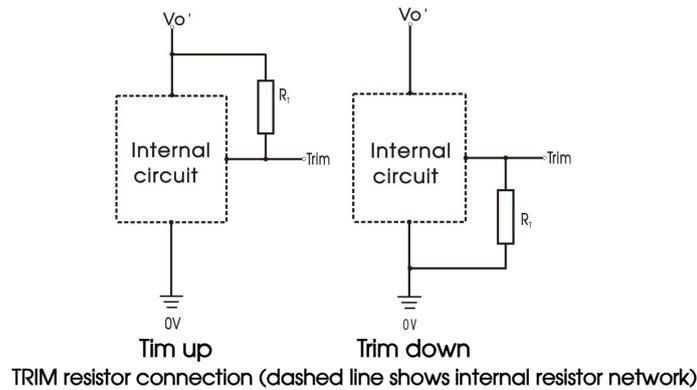


Fig. 7

Calculating Trim resistor values:

Trim up

$$R_T = \left( \frac{5.11V_{nom}(100 + \Delta\%)}{1.225\Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) (k\Omega)$$

Trim down

$$R_T = \left( \frac{511}{\Delta\%} \right) - 10.22 (k\Omega)$$

Note:

RT = Trim Resistor value

$$\Delta\% = \left| \frac{V_{nom} - V_{out}}{V_{nom}} \right| \times 100$$

$V_{nom}$  = nominal output voltage

$V_{out}$  = desired output voltage

5. Recommended solution for thermal test

During the application process, the thermal design of the product can be evaluated in combination with the product temperature derating curve, or the stable working range of the product can be determined by testing the temperature at point A in Figure 8. When the temperature at point A is lower than 125° C, it is the stable working range of the product.

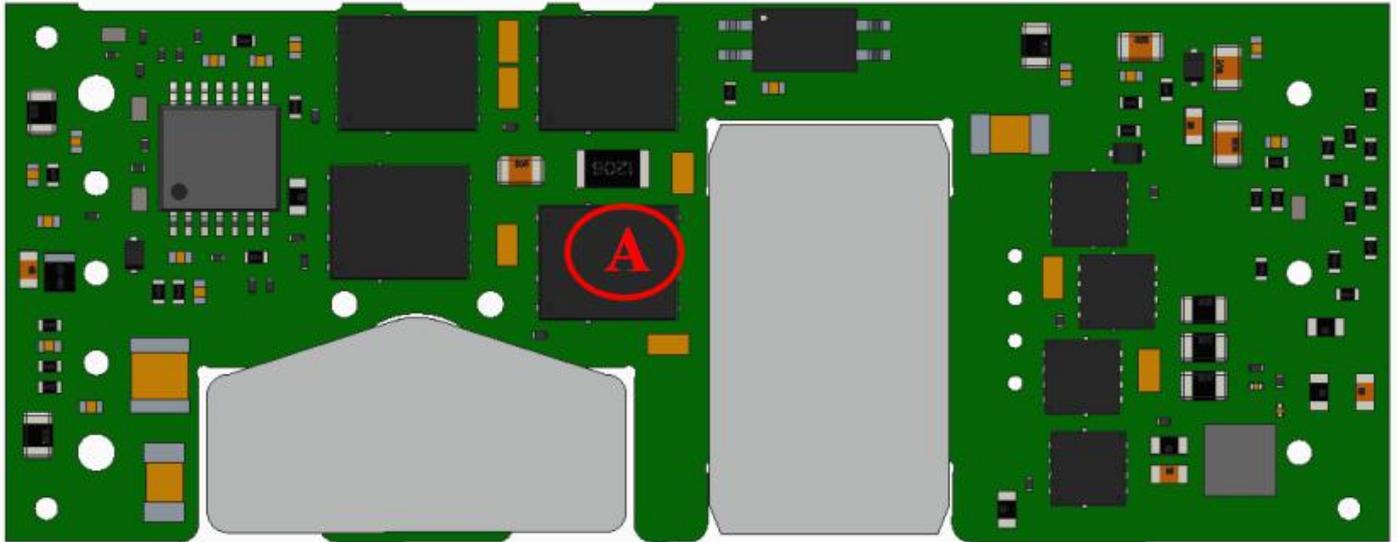


Fig.8

6. Reflection ripple current test

The input reflected ripple current should be tested according to the peripheral circuit in Fig. 9.

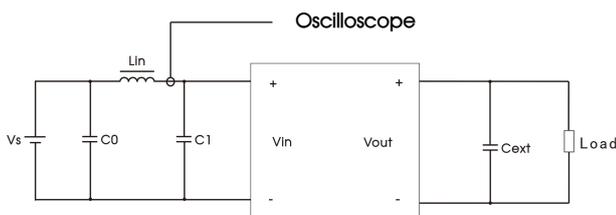



Fig. 9

Device	Parameter
C0	220μF/100V
Lin	10uH/15A
C1	470μF/100V
Cext	470μF/63V


7. The products do not support parallel connection of their output

8. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

VCB48\_EBO-240WR3-N Dimensions and Recommended Layout


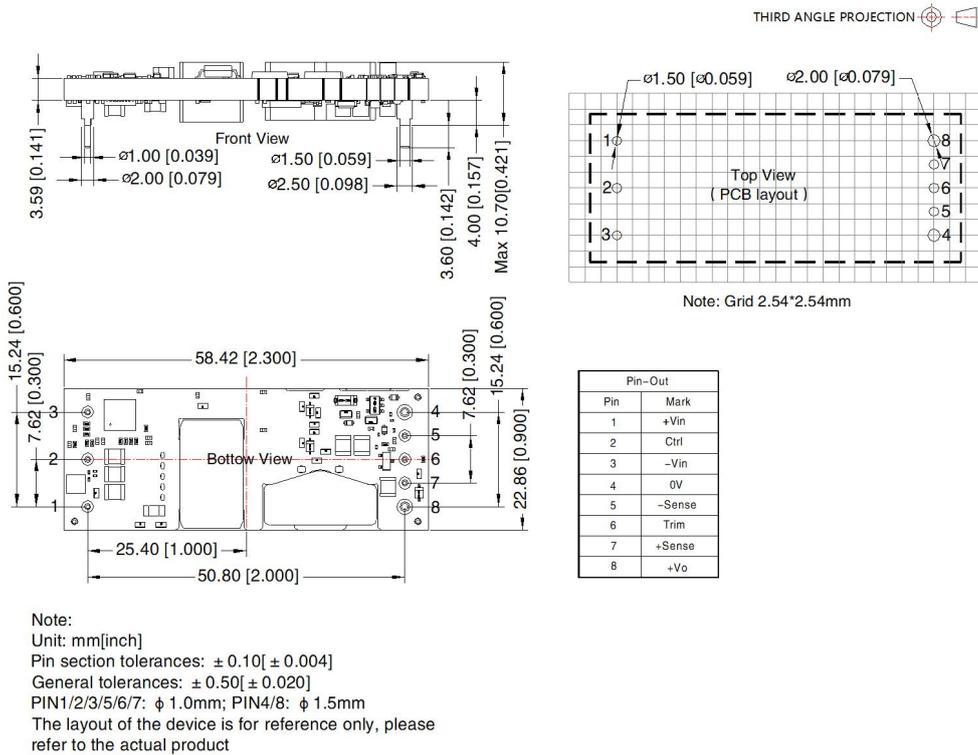


VCB48\_EBO-240WFR3-N Dimensions and Recommended Layout

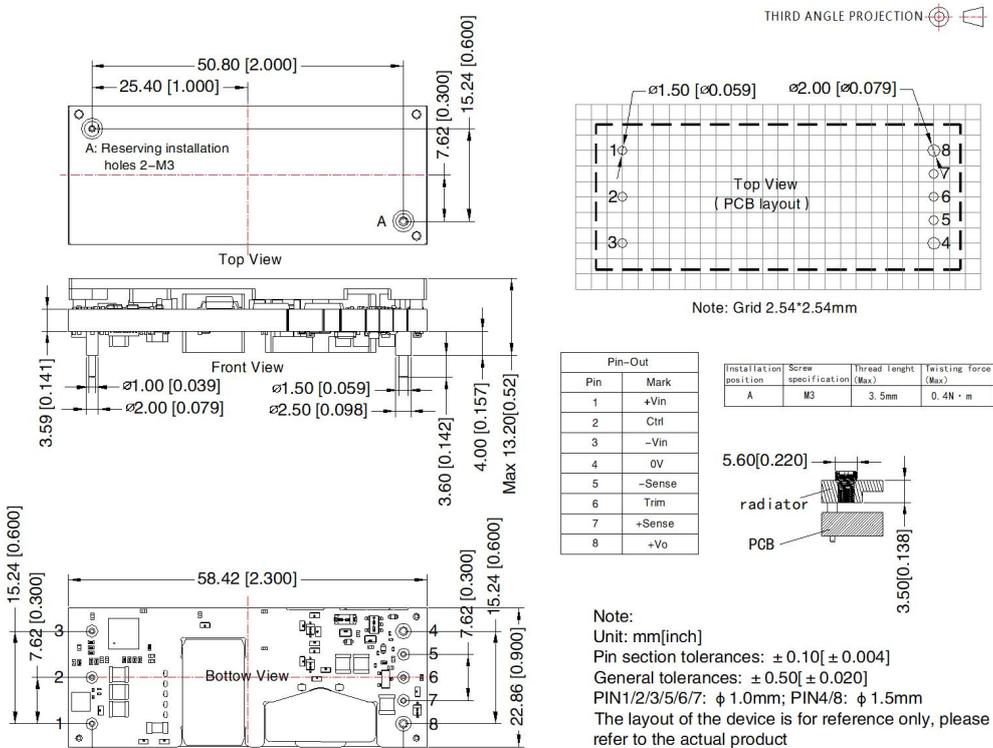

VCB48\_EBO-240WHR3-N Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

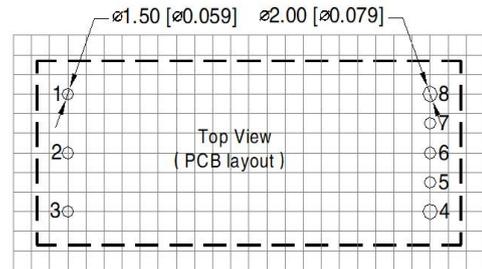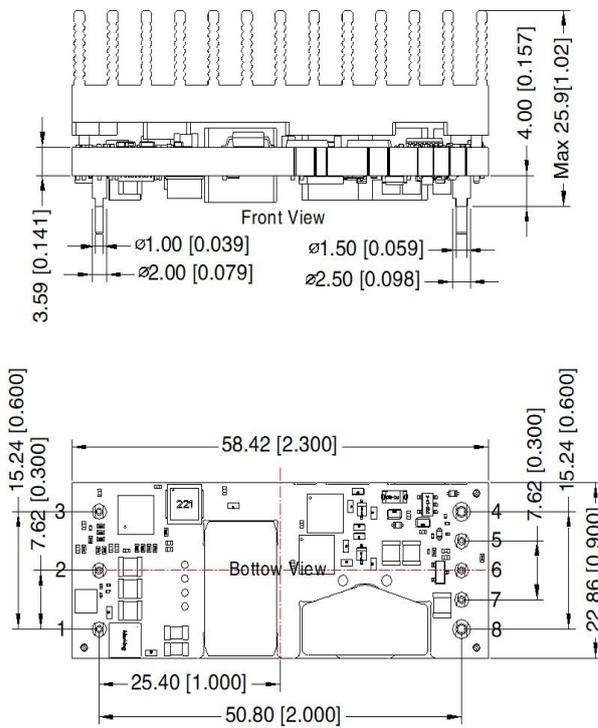

Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	-Sense
6	Trim
7	+Sense
8	+Vo

Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$   
PIN1/2/3/5/6/7:  $\phi 1.0\text{mm}$ ; PIN4/8:  $\phi 1.5\text{mm}$   
The layout of the device is for reference only, please refer to the actual product

Note:

- For the packaging information, please refer to the Product Shipping Packaging Information. Package number: 58210192(VCB48xEBO-240W(F)R3-N), 58210190(VCB48xEBO-240WHR3-N);
- The maximum capacitive load is tested in the input voltage range and under full load condition;
- Unless otherwise stated, all indicators in this manual are in  $T_a=25^\circ\text{C}$ , humidity & LT; 75%RH, nominal input voltage and output rated load measured;
- All index test methods in this manual are in accordance with the company's enterprise standards;
- Our company can provide product customization, specific needs can directly contact our technical personnel;
- The product involves laws and regulations: see "Product Features" and "EMC Features";
- After scrapping, our products shall be classified and stored in accordance with ISO14001 and relevant environmental laws and regulations, and handed over to qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)